

Bottom rolling sliding hardware for timber cabinets and light cupboard doors.

- FEATURES:**
- Smooth running ball-bearing rollers
 - Side or mortice fixing roller options


- SPECIFICATIONS:**
- Max door mass: 20Kg
 - Max door height: 1000mm
 - Max door width: 900mm
 - Door thickness: 16-22mm

- COMPONENTS**
- 76A Aluminium channel
 - 74 Nylon guides
 - 72M Side fixing rollers
 - 73M Mortice fixing rollers
 - 77A Aluminium track
 - 265P Finger pull white
 - 208 Door stop

NOTE:
Bottom track offset to top of channel for 72M side fix roller depending on thickness of the door.

Standard packed sets
Size 4J - for 2 doors in 1200mm opening
Size 6J - for 2 doors in 1800mm opening

Hillaldam Coburn Systems (Pty) Ltd
P O Box 4664, Johannesburg 2000,
South Africa
Tel: (+27 11) 626 1001
Fax: (+27 11) 626 1341
Email: info@hillaldam.co.za
Web: www.hillaldam.co.za

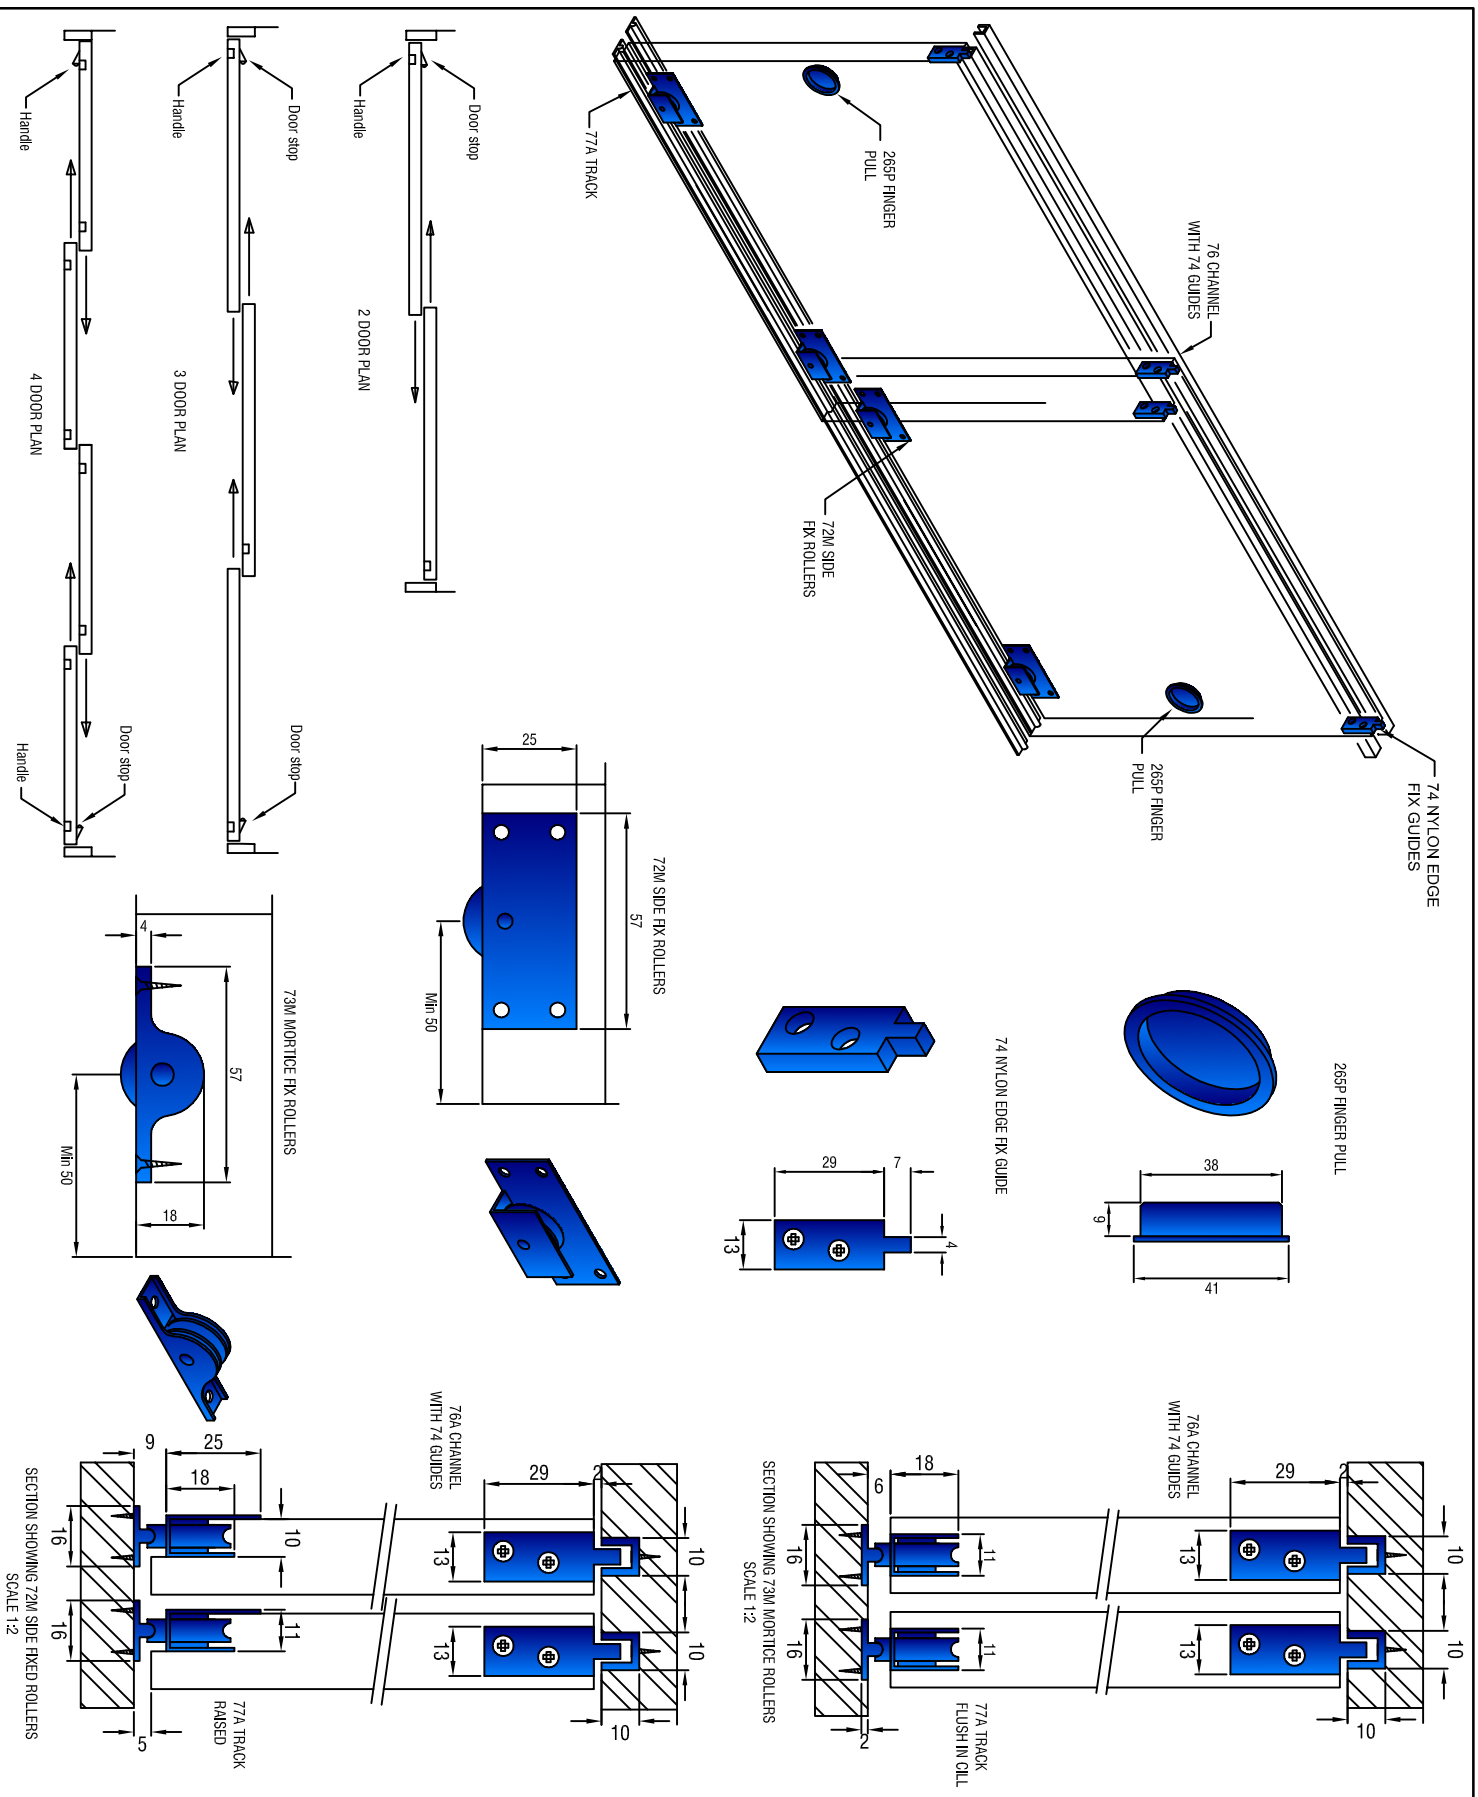


JASON FITTING GUIDE

CUTOUTS

FOR 74 TOP GUIDE
29x13x7mm IN EDGE OF
DOOR



FOR 72M BOTTOM ROLLER
FIRST CUT A 10mm WIDE BY
4mm GROOVE IN THE
BOTTOM THE THE DOOR.
THEN CUT 30x10x18mm
IN BACK FACE OF DOOR
ABOVE THE GROOVE



FOR 73M BOTTOM ROLLER
57x11x4mm IN BASE OF DOOR
WITH 11x33x20mm MORTICE

